GE
Lighting

Installation Guide
Track Fixture
Engineering Samples

GE LED Track Fixture

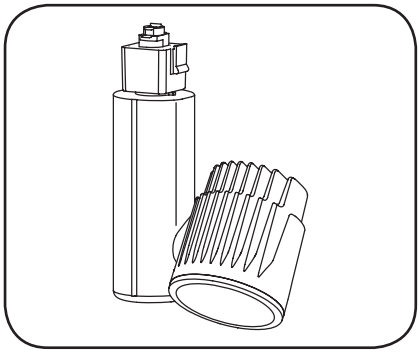

Track Fixture Samples:

SKU	Product Description	Power	Input Current	Input Voltage	Frequency
TBD	ENG. SAMPLE 2000lm/830/FL	20W	167mA	120 V	60Hz
TBD	ENG. SAMPLE 1000lm/830/FL	10 W	87 mA	120 V	60Hz
TBD	ENG. SAMPLE 1500lm/830/FL	15 W	125 mA	120 V	60Hz
TBD	ENG. SAMPLE SPOT/830	20W	167mA	120 V	60Hz

BEFORE YOU BEGIN

Read these instructions completely and carefully.

FOR USE WITH CEILING MOUNTED TRACK ONLY.

READ GLOBAL trac eco TRACK INSTALLATION INSTRUCTIONS D2234B FOR GUIDELINES ON TRACK INSTALLATION.

⚠ WARNING

RISK OF ELECTRIC SHOCK
Turn power off before inspection, installation or removal.

⚠ CAUTION

To reduce risk of fire and electric shock, use only with Nordic Aluminum GLOBAL eco GES2 track system.

imagination at work

IMPORTANT SAFETY INSTRUCTIONS

When installing or using this track system, basic safety precautions should always be followed, including the following:

a) Read all instructions
b) Do not install this track in damp or wet locations.
c) Do not cut any track sections.
d) Do not install any part of a track system less than 5 feet above the floor.
e) Do not install any luminaire assembly closer than 6 inches from any curtain, or similar combustible material.
f) Disconnect electrical power before adding to or changing the configuration of the track.
g) Do not attempt to energize anything other than lighting track luminaires on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the track.
h) Do not connect a track to more than one branch circuit unless the track is constructed so that it can be used with more than one branch circuit. Check with a qualified electrician. Although the track lighting system may seem to operate acceptably, a dangerous overload of the neutral may occur and result in a risk of fire.

SAVE THESE INSTRUCTIONS

For future reference when adding fixtures or changing the track configuration.

Select Circuit Position

The fixture adapter can be used on both GLOBAL eco GES (one circuit) and GET (two circuit) track systems. An adjustable contact on the fixture adapter allows you to select the circuit position.

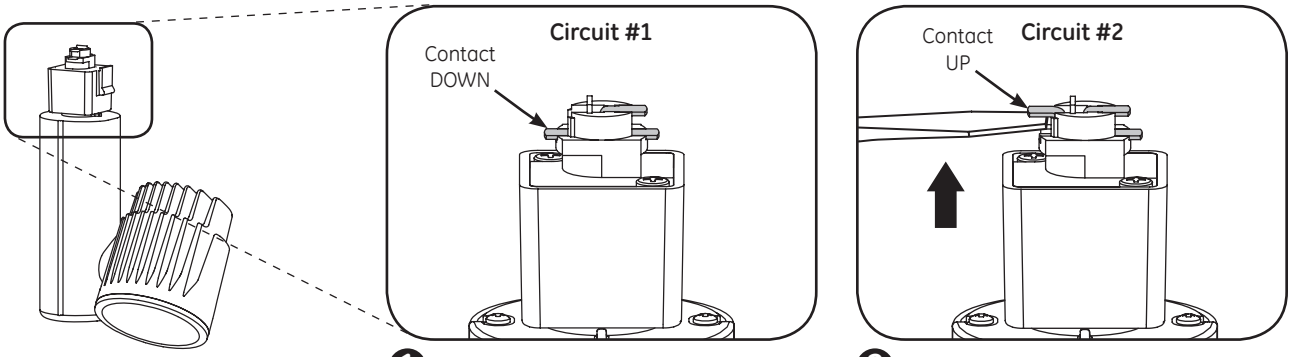

1. For one-circuit installation, no adjustment is required. Contact is in the down position.
2. For two-circuit installation, lift the lower contact to the up position with a narrow blade screw driver.

Fixture Installation

CAUTION: Fixtures supplied with the GES66 adapter can be used only with GLOBAL eco trac. Attempted use on any other track could cause fire and electrical hazard.

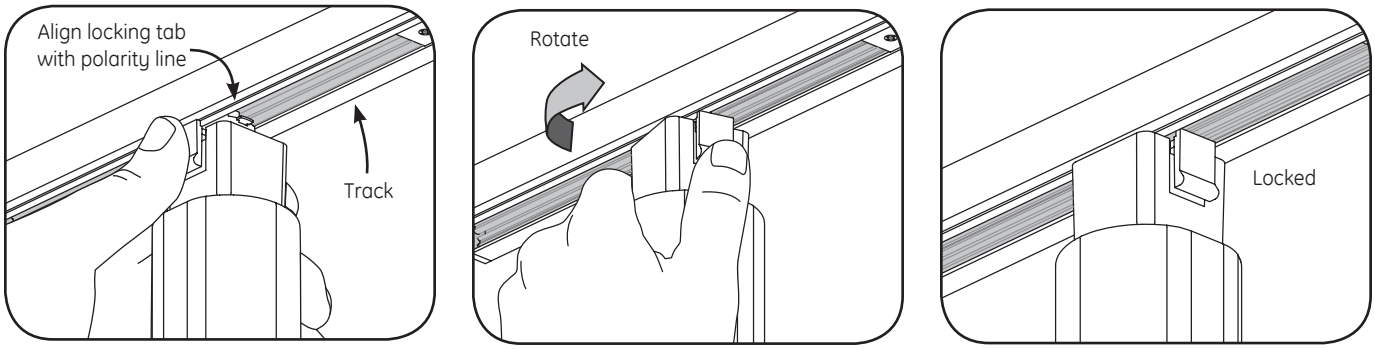

1. Hold the adapter below the track with your thumb on the locking tab. Make sure the locking tab is positioned directly below the polarity line. Push adapter into track.
2. Rotate adapter 90 degrees clockwise, making sure the polarity lines match between the track and the fixture adapter.
3. Release the locking tab and the fixture should snap into position.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class [A] RFLD complies with the Canadian standard ICES-003. Ce DEFR de la classe [A] est conforme á la NMB-003 du Canada.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Fixture intended for commercial use only. Use only in non-insulated applications.

GE Lighting • 1-888-MY-GE-LED **(1-888-69-43-533)** • www.gelighting.com

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. The GE brand and logo are trademarks of the General Electric Company.
© 2014 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.